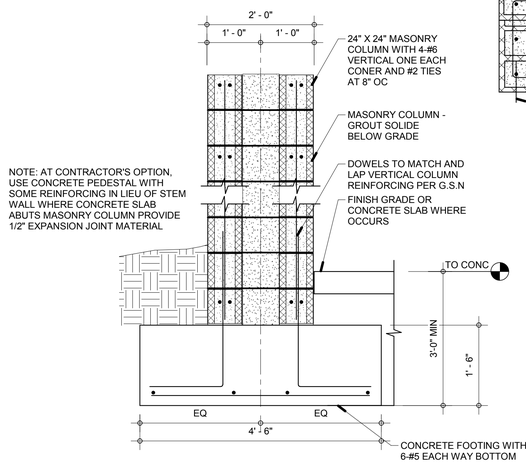

6 EXTERIOR MASONRY COLUMN FOOTING

3/4" = 1'-0"



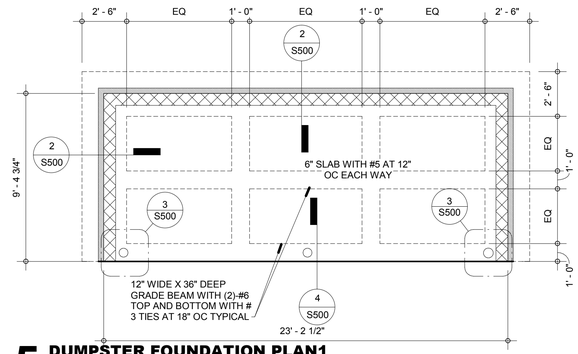

5 DUMPSTER FOUNDATION PLAN1

1/4" = 1'-0"

LIGHT POLE BASE SCHEDULE

MAX POLE HT	MIN PIER DIAMETER	MIN DEPTH	VERT REINF	HOOP TIES	NOTES
20'-0"	18"	8'-0"	(6) #6	#3 AT 12" OC	1,2
30'-0"	24"	12'-0"	(6) #6	#3 AT 12" OC	1,2

NOTE(S):

1. CONTRACTOR SHALL PROVIDE AN ALLOWANCE FOR PIER CASINGS ON A PER LINEAR FOOT BASIS AS PER DIVISION 1 OF THE PROJECT SPECIFICATIONS. ALSO REFER TO THE GEOTECHNICAL REPORT FOR PIER CASING REQUIREMENTS.
2. SPLICE VERTICAL REINFORCING IN PIERS WITH CLASS B TENSION LAP SPLICE.
3. OPTIONAL CONSTRUCTION JOINT IS ACCEPTABLE. DO NOT SPLICE VERTICAL REINFORCING ABOVE JOINT.

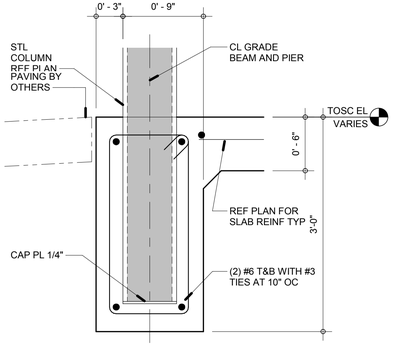

4 GATE COLUMN TO CMU

1 1/2" = 1'-0"

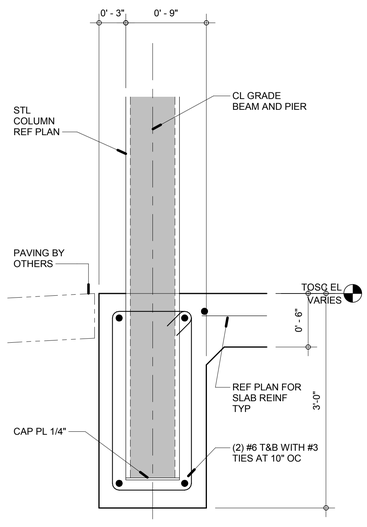

3 GATE COLUMN TO CMU

1 1/2" = 1'-0"

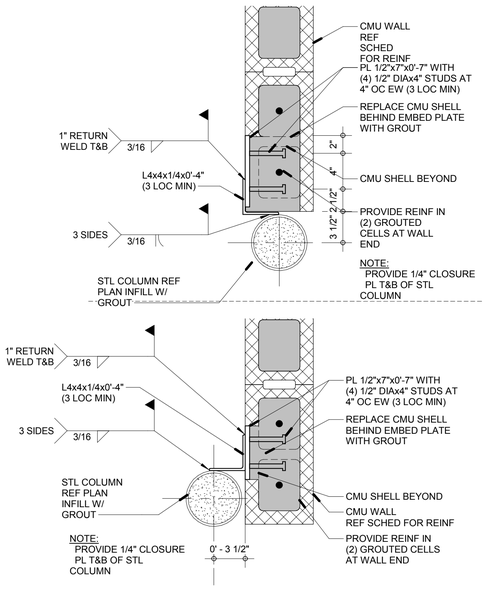

2 CMU WALL

3/4" = 1'-0"

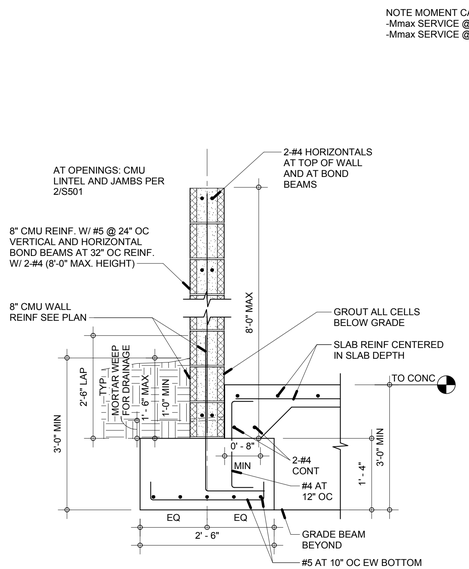

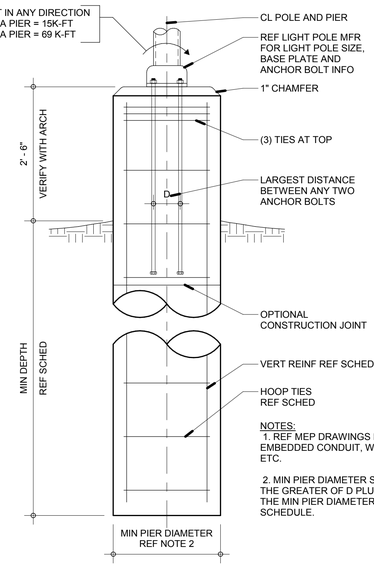

1 TYPICAL LIGHT POLE BASE

3/4" = 1'-0"

PLOT DATE: 8/18/2019 8:22:25 PM TEMPLATE VERSION

DLD ENGINEERING
18106 FIRST BEND DR.
CYPRESS, TX. 77433
O:832.422.9350

ARCHITECT

O 281 410 1349
www.wsquaredarch.com
W [SQUARED] ARCHITECTS

DESIGN ARCHITECT
W SQUARE ARCHITECTS
3302 CANAL STREET, SUITE 36
HOSUTON, TX 77003
PHONE: (281) 410-1349

GREATER HEIGHTS SCHOOL
HOUSTON, TEXAS

STATE OF TEXAS
SLAVEN SEFEROVIC
106824
LICENSED PROFESSIONAL ENGINEER

07/22/2019

TEXAS REGISTERED ENGINEERING FIRM F-17306
THE INFORMATION DISCLOSED HEREIN IS PROPRIETARY WITH DLD ENGINEERING LLC., AND SHOULD NOT BE USED, DUPLICATED OR DISCLOSED WITHOUT ITS EXPRESS WRITTEN PERMISSION.

UNAUTHORIZED USE OR COPYING OF THIS OR ANY CONTENTS HEREOF IS STRICTLY FORBIDDEN

PROJECT: 002-1029.19.00
DRAWN BY: Author
CHECKED BY: Checker
DRAWING SCALE: AS NOTED

REVISION

NO.	DESCRIPTION	DATE

DATE
07.22.2019

ISSUE
PERMIT SET

BUILDING TITLE
GH SCHOOL
4724 N MAIN STREET

SHEET TITLE
TYPICAL FOUNDATION DETAILS

SHEET NO.
S500